

## ASAP2 Toolkit – ASAP2 Editor & Tools



The Visu-IT! **ASAP2Toolkit** is a standalone application to create, import, merge and update "ASAM MCD 2MC" description files (\*.a2l).

The ASAP2Toolkit contains an ease to use **ASAP2 Editor** for defining and managing calibration and measurement items to be used in embedded controllers as well as attributes and settings required for configuring calibration systems.

### Key Features

The ASAP2Toolkit

- contains an easy to use and intuitive ASAP2 editor
- provides functionality to import, maintain and export ASAP2 files
- manages both ASAP2 calibration and measurement objects as well as ASAP2 definitions required for configuring calibration systems
- provides an automatic address update
- enables the user to use standard development process files "\*.i3e" (IEEE-695) and "\*.elf" (ELF-DWARF) to generate an a2l description file automatically (-> import labels from e.g. ELF-DEBUG files)
- provides a2l output files, which are compliant to measurement and application systems like INCA

### Use Cases

The ASAP2Toolkit supports the following main use cases:

- Import ELF/I3E File & generate A2L file
- Read A2L file & generate A2L file
- Edit data in "ASAP2Editor" & generate A2L file

Note: Of course, the UseCases can be combined and mixed according to customer needs

### Compatibility


The ASAP2Toolkit processes and generates ASAP2 files which are compliant with the standard ASAM MCD 2MC V1.x.

The ASAM MCD 2MC description files contain information like:

- Measurements and calibration variables (parameters, curves, maps)
- physical addresses, conversion formula, data types, etc...
- ECU interface description ( XCP on CAN or ETK )
- Calibration methods ( SERAM, SERAP )
- Record layouts
- etc.

### Workflow

The ASAP2Toolkit helps to establish a link between the Software Development and the Measurement & Calibration. ECU variables from the source code can be transferred into ASAP MCD

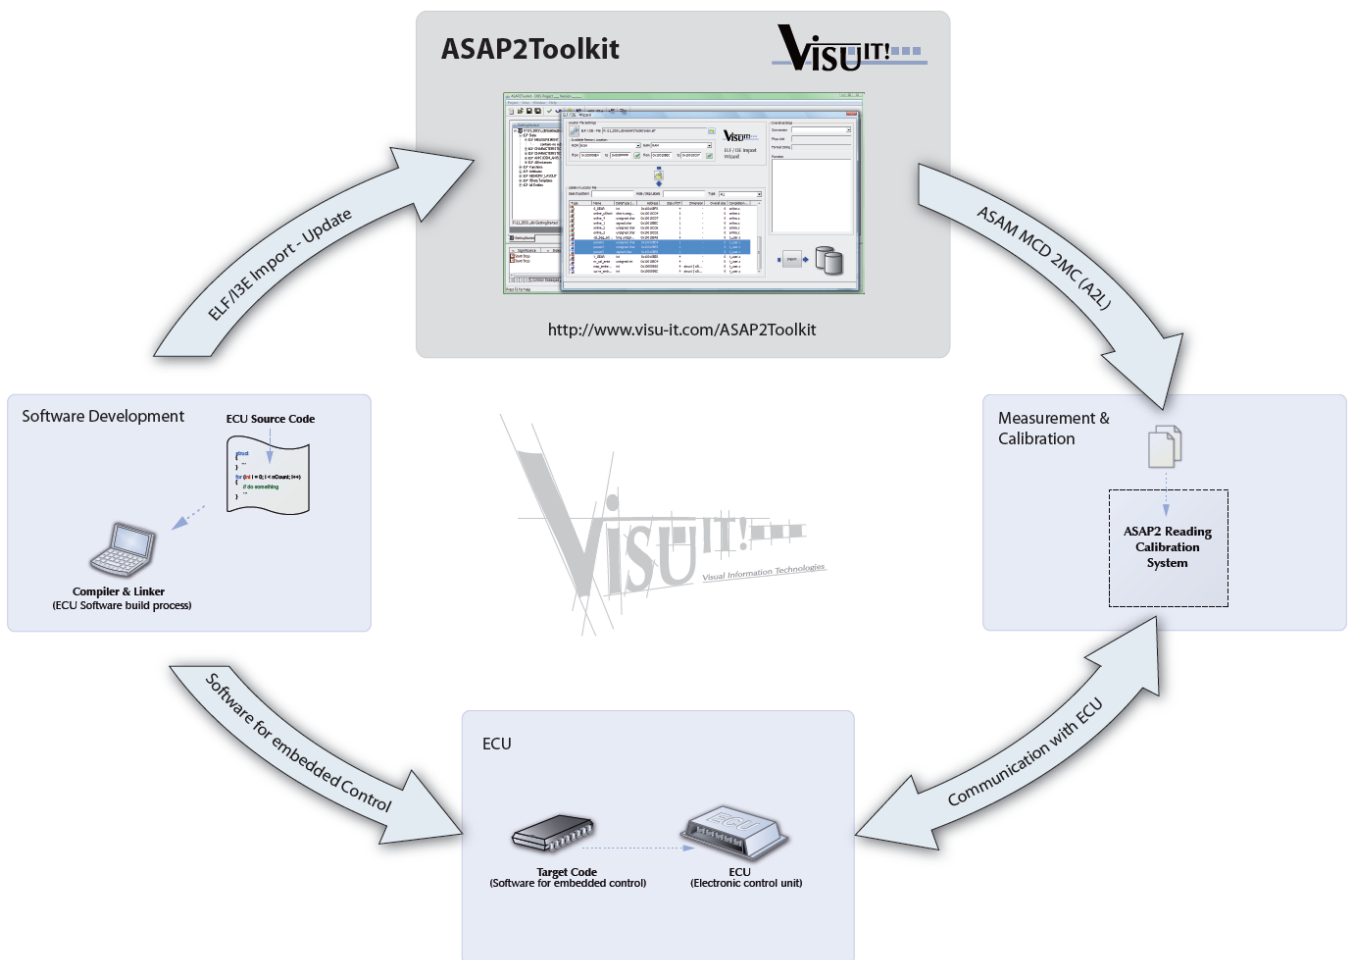

2MC files used from measurement and calibration systems like INCA.

---

*Link between SW-Development and Measurement & Calibration*

## Interfaces

- ASAM-MCD-2MC export: versions 1.6, 1.5.1, 1.4.1, 1.3.1, 1.2.1
- ASAM-MCD-2MC import: versions 1.6, 1.5.1, 1.4.1, 1.3.1 and 1.2.1
- ELF/DWARF import: DIAB DATA (Motorola MPC555 series), Hitachi (SH7055), Tasking TriCoreVX, etc.
- IEEE-695 import: Tasking C166, Tasking TriCore, etc.
- COFF import: MPLAB C18

## Terminology

ASAM MCD 2MC	Official name of the standardized description exchange file
ASAP2	Common naming of the "ASAM MCD 2MC" standard
A2L	File suffix of "ASAM MCD 2MC" description file (*.a2l). It is also a common naming for "ASAP2"

## System Requirements

Operating System	Windows 7, Windows 10
Hard disk	100 MB (minimum) of free hard disk space, depending on database size
Display resolution	1024x768, 256 colors, 17 inch

## Contact

Visu-IT! GmbH	Phone:	+49 (0)9947 / 9040004
An der Schergenbreite 1	Fax:	+49 (0)941 / 49082-19
93059 Regensburg	Email:	<a href="mailto:contact@visu-it.com">contact@visu-it.com</a>
	Internet:	<a href="http://www.visu-it.com/ASAP2Toolkit">http://www.visu-it.com/ASAP2Toolkit</a>